





Sr.No.	Profile/Section	Description (Web x Flange x Lip)	Thickness
1.	'C' & 'Z'	80 x 40 x 15	1 to 3.15 mm
2.	'C' & 'Z'	90 x 45 x 15	1 to 3.15 mm
3.	'C' & 'Z'	100 x 40 x 15	1 to 3.15 mm
4.	'C' & 'Z'	120 x 50 x 15	1 to 3.15 mm
5.	'C' & 'Z'	140 x 50 x 15	1 to 2.50 mm
6.	'C' & 'Z'	160 x 40 x 15	1 to 2.50 mm
7.	'C' & 'Z'	180 x 50 x 15	1 to 2.50 mm
8.	'C' & 'Z'	200 x 40 x 15	1 to 2.50 mm
9.	'C' & 'Z'	220 x 50 x 15	1 to 2.50 mm
10.	'C' & 'Z'	240 x 50 x 15	1 to 2.50 mm

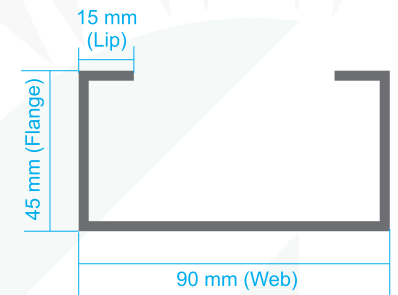

'C' Channel

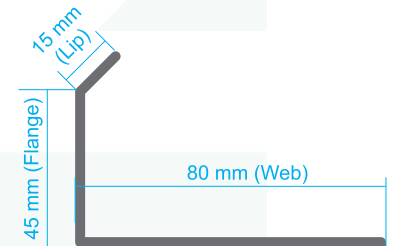

'Z' Channel

Type of Material

Pre-Galvanised : 80 gsm to 550 gsm

Galvalume : A2150 gsm

Post Galvanised : Hot dip to 60 micron to 120 micron

Size :

- Web 80mm to 300mm \pm 3 mm tolerance
- Flange 40mm to 75mm \pm 2 mm tolerance
- Lip 10mm to 20mm \pm 2 mm tolerance
- Hole Punching upon requirement \pm 2 mm tolerance

Advantages with us :

- Uniform and consistent channels (c and z type).
- Variable width and flange can be manufactured with customized length.
- Superior surface finish.
- Economic and scalable production of large volumes can be attained.
- Various application such as PEB building and Solar Power plants.

Note :

- The size mentioned in above table are standard & it can be also customised as per customers requirement.
- All dimension are in 'mm', unless specified.








AN ISO 9001:2015 & 14001:2015 CERTIFIED COMPANY

FOURSUN SOLAR

ELECTRIFYING SUN

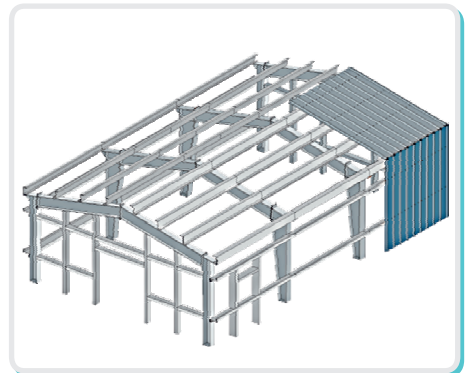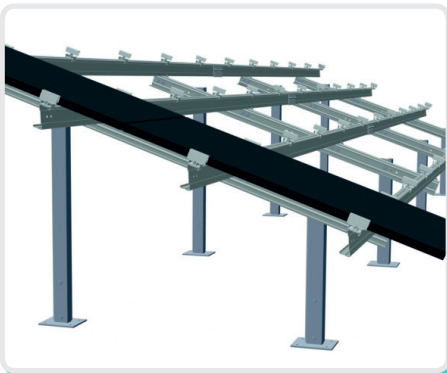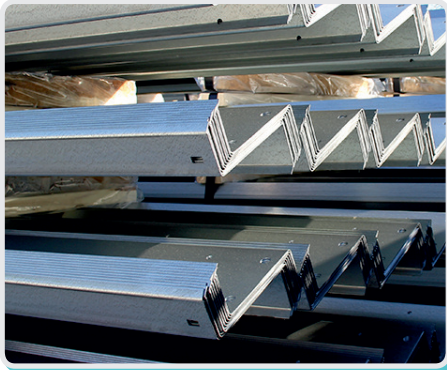

FOURSUN SOLAR

- 🏠 "Kesharkala", 4/11, Patelnagar, 80 Feet Road, Rajkot-2 (Gujarat)
- ☎ +91 9979899494, +91 281 2364063, 2360129
- ✉ sagarpaliya@foursunsolar.co.in 🌐 www.foursunsolar.com

